

PRODUCT DESCRIPTION

Rosco LitePad™ is a slim profile light source that generates a soft even beam of light and almost no heat. Its small form factor and light weight make the Rosco LitePad™ perfect for use in many places where a larger, typical luminaire could not fit. Drawing just a few watts of power, LitePad is simple, fast and economical to use in film and television, theatre and live entertainment, and retail and event lighting.

Use Rosco LitePad™ for:

Accent lighting on and built into scenery:

Add light behind windows and doors with only 1" of space between framing and opening.

Use LitePad™ as the source on the front of a TV or computer monitor, even for special effects like glowing props

Backstage Lighting:

Gently illuminate hazardous areas such as stairs and platform edges

Orchestra lighting

Supplementary Lighting kit for stage or set:

Small soft sources provide additional light and can be mounted into virtually any nook on set.

Color Temperature: 6000° - 7000° Kelvin

Thickness: .3" (7.6 mm)

Operating Temperature: -30C – +85C

Lamp Life: 100,000 hrs.

see Photometric info on back of sheet



PRODUCT SPECIFICATIONS

Available in 6 basic sizes:

290603030120	3"x3" (76.2 mm x 76.2 mm)
290603060120	3"x6" (76.2 mm x 152.4 mm)
290606060120	6"x6" (152.4 mm x 152.4 mm)
290603120120	3"x12" (76.2 mm x 304.8 mm)
290606120120	6"x12" (152.4 mm x 304.8 mm)
290612120120	12"x12" (304.8 mm x 304.8 mm)

Units are sold individually and include a simple 12v transformer.

Also available in convenient kit:

29064000TKIT Complete kit: 2 each of all 6 sizes


Accessories:

- Mounting Hardware
- 12v 3amp Power Supply
- 10ft (3m) Extension Cable
- 12v Car Adapter
- 12v Battery
- Carrying Case
- Y splitter cable

L15 LIT01 1006

Photometrics

		6"	12"	18"	24"	Wattage	Amperage
3" x 3"	LUX	515	142	65		1.2	.1
	FC	48	13	6			
3" x 6"	LUX	970	312	145		3.6	.3
	FC	90	30	14			
3" x 12"	LUX	1255	520	255		7.2	.6
	FC	116	50	25			
6" x 6"	LUX	1610	510	248	145	3.6	.3
	FC	150	48	23	13.5		
6" x 12"	LUX	2063	756	385	223	7.2	.6
	FC	192	71	36	21		
12" x 12"	LUX	2810	1216	645	366	14.4	1.2
	FC	260	113	60	35		

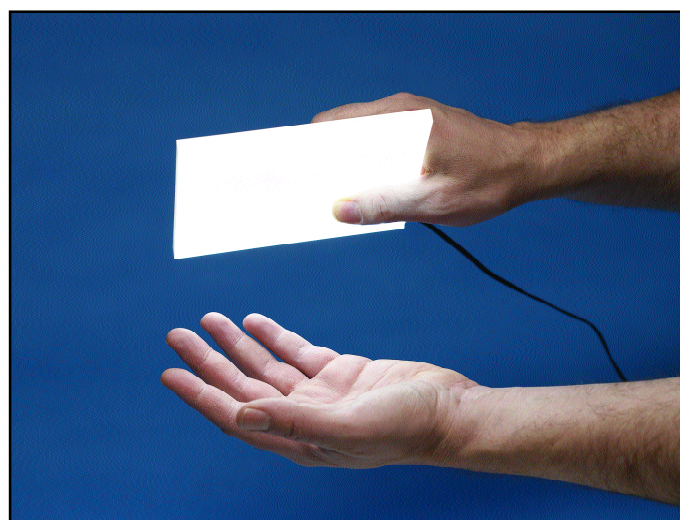

Litepad units are available in six standard sizes from 3" x 3" to 12" x 12". All are only 0.3" thick.